

### 1 Check accessories for completeness:

Scope of delivery:


- A. Assembly and operating instructions
- B. Screw cover caps
- C. Two-way key bit
- D. 2 pcs. fasteners
- E. Declaration of Conformity for the installer
- F. Fixing screws (4.5 x 50)  
Fixing screws (4.5 x 80)
- G. Hinge pin x4

Tools required:

- spirit level
- masonry drill  $\varnothing 10$
- Cordless screwdriver/cordless drill
- Hammer
- Pliers


**Please note:**

Setting up the CS 90 module enclosure requires **2-3 people**

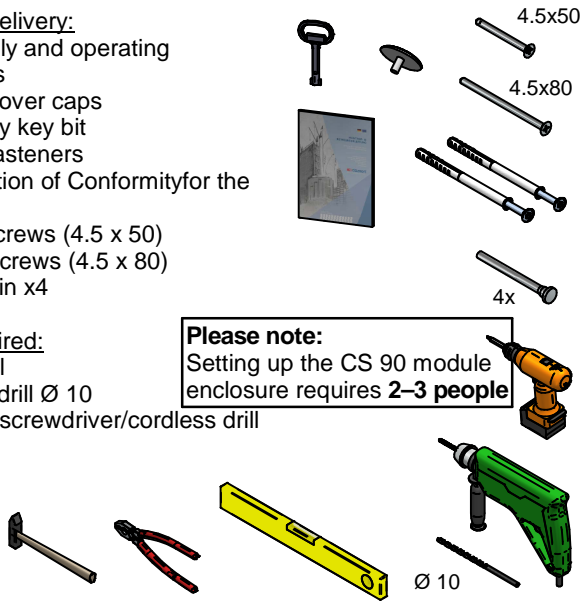

### 2 Set up base module

Level the base module on a clean, solid, non-flammable floor\*.

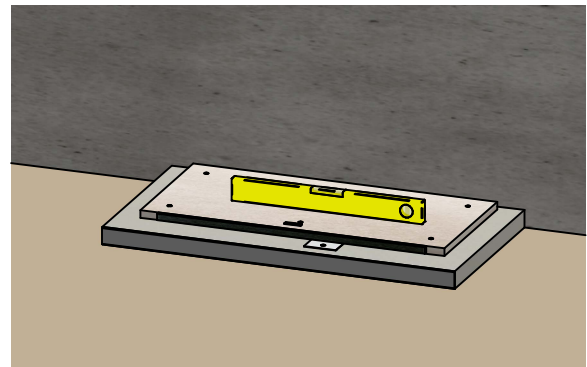

\* if the floor is too uneven, if necessary, level the floor before starting the assembly

### 3 Place the rear panel

Place the rear panel loosely between the solid wall and the top panel on the base module (Fig. 1).





Fig. 1

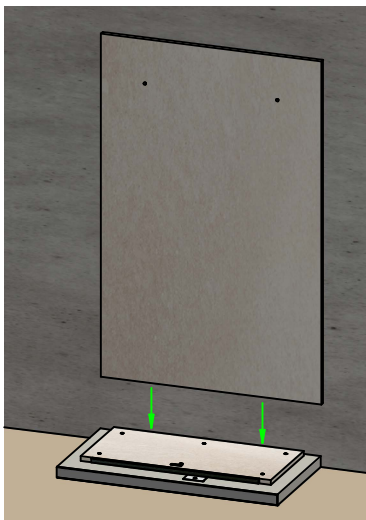

**Caution!**  
Risk of tipping!

### 4 Place inner side modules

Place the inner side modules on the base module (Fig. 2).





Fig. 2

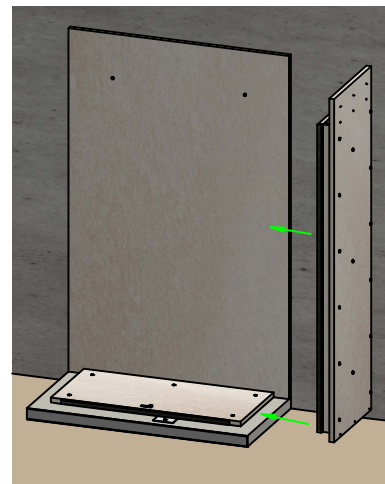

**Caution!**  
Risk of tipping!

Example: inner side module, right

### 5 Screw together inner side modules

Screw the inner side module into the base module through the pre-drilled lower row of holes (Fig. 3) using the included screws. Repeat steps 4 and 5 with the opposite inner side module.

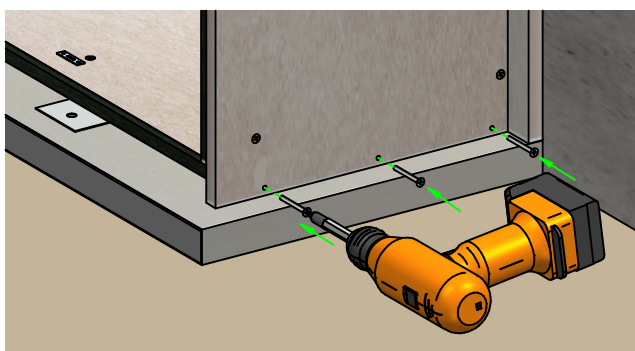


Fig. 3

### 6 Place inner cover module

Place the inner cover module onto the inner side modules as shown (Fig. 4).






Fig. 4

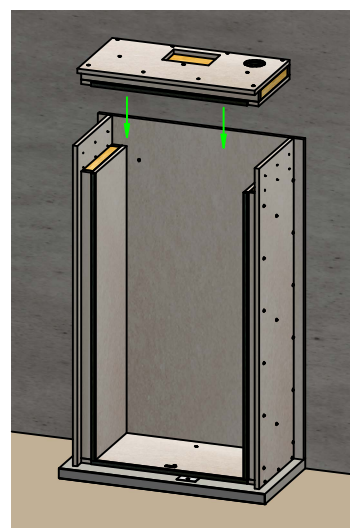

**Caution!**  
Risk of crushing!

### 7 Fastening inner cover module



Screw the inner cover module in place from the outside, passing the screws through both inner side modules (Fig. 5).

Screw fastening through the top two rows of screw holes

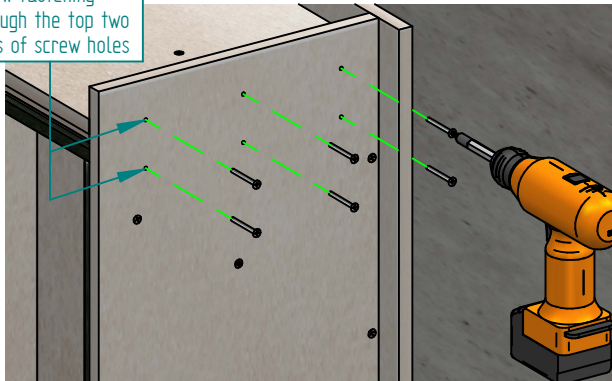


Fig. 5

### 8 Place outer cover module

Place the outer cover module between the two inner side modules onto the inner cover module (Fig. 6).





Fig. 6

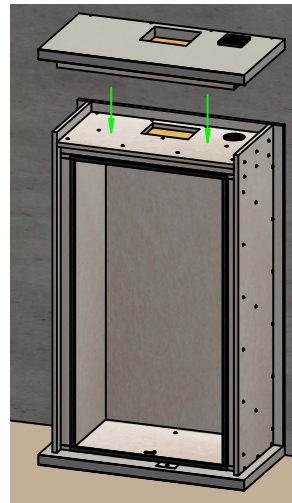

**Caution!**  
Risk of crushing!

### 9 Place first outer side module

Place the outer side module on the base module and against the inner side module (Fig. 7).







Fig. 7

Example: outer side module, right


### 10 Fastening first outer side module

Screw the outer side module to the base module and rear panel using the screws provided (Fig. 8). Repeat steps 9 and 10 with the opposite outer side module.

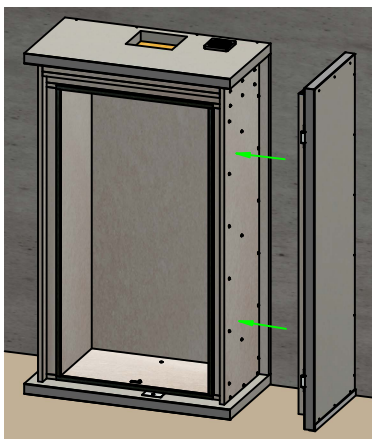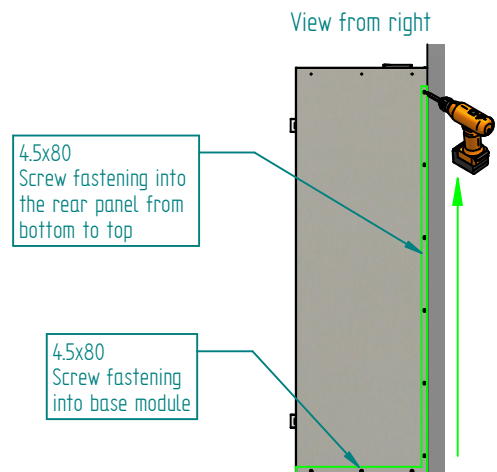

Example: outer side module, right Fig. 8


### 11 Fastening outer cover module



Screw together the outer cover module with both outer side modules (Fig. 9).  
Screw together the outer cover module with the rear panel (Fig. 10).

View from right

4.5x80  
Screw fastening into outer side module



Top view




Fig. 10



4.5x80  
Screw fastening into rear panel

Fig. 9


Example: outer side module, right

### 12 Insert closure/door leaves

per hinge:  
- 1x hinge pin

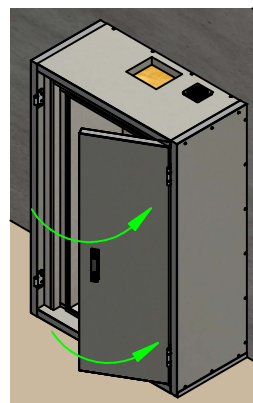

- insert the hinge half of the closure/door leaf into the hinge half of the outer side module



- insert hinge pin (use a hammer if necessary), if hinge leaves do not align --> slightly press together with pliers

Example: closure/door leaf, right


Then check the gap dimensions of the closure/door leaf for uniformity

### 13 Wall mounting




Before drilling, please check:

- enclosure is vertically aligned
- Gaps between the enclosure and the rear panel
- Diagonal dimension



- drill through pre-drilled holes in rear panel (drilling depth = dowel length + 10mm)



- remove drilling dust from drilling holes
- drive in dowel+screw by means of push-through installation (use a hammer if necessary)






- tighten the screw firmly using a cordless screwdriver (Torx 40)



**Caution!**  
Do not overtighten!  
Do not sink the screw head into the material!!



### 14 Check closure for ease of movement

It must be possible to open and close the enclosure easily. (if necessary, open and close the swivel lever/slider several times)

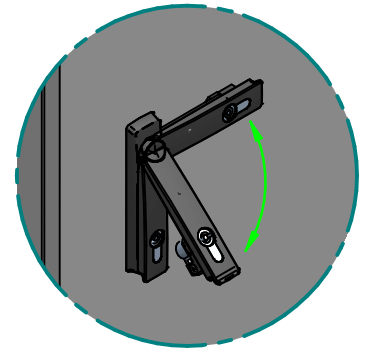


### 15 Attach the cover caps

Fit the cover caps onto the screws. (use a hammer if necessary)

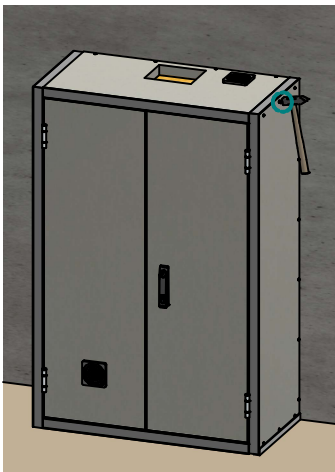

### 16 Final check

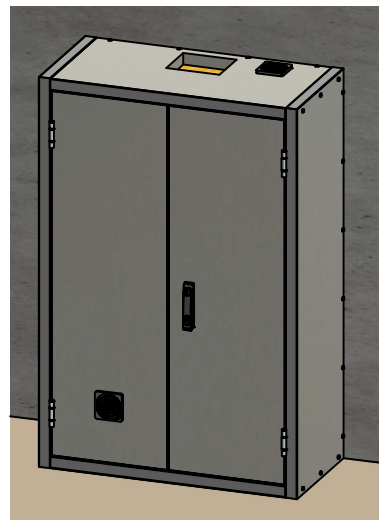

### 17 Install the cable box

See the separate installation instructions for the cable box...

for further information on the operation and installation of our products, please refer to our assembly and operating instructions and the QR code to scan



**Assembly and  
Operating  
Instructions**  
Please print and keep it  
in the enclosure!